



www.aquila.dk

High pressure  
cleaning equipment  
for professionals



# TD/SD166

## SPECIFICATIONS

Pressure:	16-160 bar*
Water power:	60 l/min*
Pump:	Pratisoli Industrialpump
Max. temperature:	99°C* / 150°C**
Engine model:	Kubota V1305
Engine type:	Diesel 4 cyl.
Engine power:	28 kw
Fuel tank:	80 litres
Water tank:	700 litres
Trailer dimensions LxWxH:	351x179x169 cm
Van mount dimensions LxWxH:	200x120x128 cm
Weight:	920 kg / 700 kg
Hot water driven:	Yes
Heat exchanger:	Yes

\* step less regulation of pressure and water flow

\*\* Higher temperature can be reached by reduced flow

## SAFETY SYSTEM WITH ERROR INDICATION

Open engine lid compartment
Low water level
Wash water temperature
Oil pressure
Engine temperature
Chimney lid
Engine overheat protection
Flame surveillance

## STANDARD EQUIPMENT


Heat exchanger
Spray gun and lance
50 m water supply hose on reel
50 m high pressure hose on reel

## EXTRA EQUIPMENT – FACTORY MOUNTED

Hazard lights
Descale system
Anti freeze system
Chemical injection system
Automatic throttle control – ATC system
Remote control
Electric hose reels
Hydraulic hose reels

## ACCESSORIES

Water sandblasting kit
Extension hose and reels
Spray guns and lances
Drain cleaning and other nozzles
Injection pump with suction

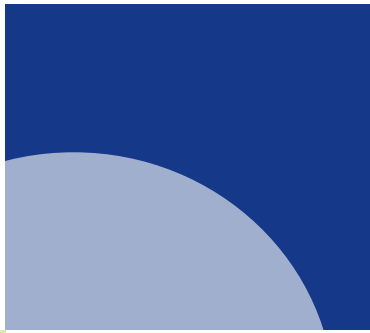

www.aquila.dk

High pressure cleaning equipment for professionals



# TD/SD166

## ADVANTAGES

- Can be used to separate greasy fluids
- Ideal for agriculture and drain cleaning
- A machine in a middle class size
- Large accessory program
- Large amount of know-how and experience as back-up
- Extensive service

## ACCESSORIES

Floor tools:



Wall tools:



Turbo nozzles:



Spray guns and lances:



Chewing gum cleaners:



Chute cleaners:



Pipe cleaning nozzles:



Wet sandblasting kit:

